CUTTING | SERVICE | C400

| FEATURES |
|---|
| Full protection |
| Foot pedal operation |
| Direct Insert Hose From Front |
| Enhanced Structure Stable Cutting |
| CE Approved |

| OPTIONS |
|---|
| Toothed blade |
| 110V/220V 1 Phase |
| 230V/440V/480V 3 Phase |

# C400

| TECHNICAL DATA | |
|---|---|
| Max. hose size (inch) [1] | 2"4SP |
| Diameter (blade) external (mm) | 250 |
| Diameter (blade) internal (mm) | 40 |
| Max. hose OD (mm) | 75 |
| Exhaust outlet OD (mm) | 100 |
| Motor Power (KW) [2] | 3.0(400V 3 Phase) |
| Motor Power (HP) [2] | 4.0 |

| DIMENSIONS (LxWxH) | | WEIGHT | |
|---|---|---|---|
| Machine (mm) | 840x550x1150 | Machine (kg) | 150 |
| Machine (inch) | 33.1x21.7x45.3 | Machine (lbs) | 330 |
| Packaged (mm) | 900x690x1320 | Packaged (kg) | 170 |
| Packaged (inch) | 35.4x27.2x52.0 | Packaged (lbs) | 375 |

1) Hydraulic hose, 1-2 wire / 4 wire
2) 3-phase / 1-phase

| STANDARD FEATURES |
|---|
| Foot Pedal Operation |

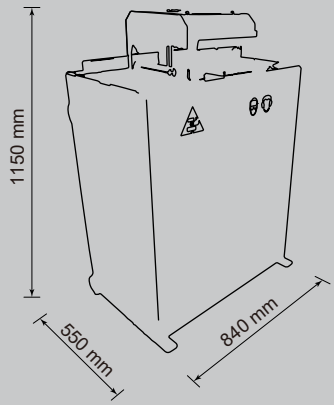


Products images & Specifications may alter prior official notice at any time.