CRIMPING | SERVICE | P16AP

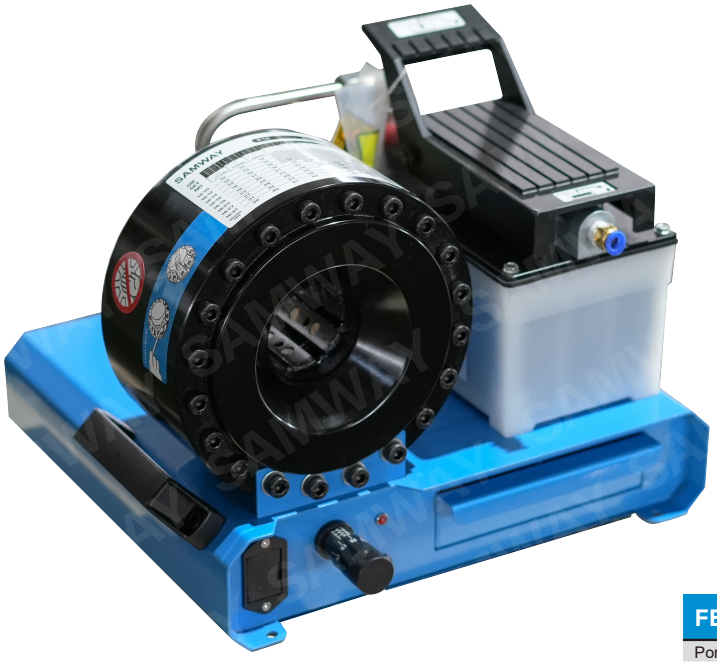

P16AP

PORTABILITY FOR SERVICE

SAMWAY P16AP is air pump operated hydraulic crimping machine for repair workshops and field use. Easy to use, light and compact in size, allowing to be carried to any location.

Available also with hand pump (HP-model) and separate head/power pack configuration (Z-model).

FEATURES

- Portable 1"3 wire Crimper
- No electricity required
- Enerpac Hand Pump
- Complete Die Set

OPTIONS

- Electrical Pump
- 220V 1 Phase / 400V 3 Phase
- Hand Pump
- Custmized Die sets
- Custmized Logo

CONTROL

Micro Dail

MODELS

Z-model

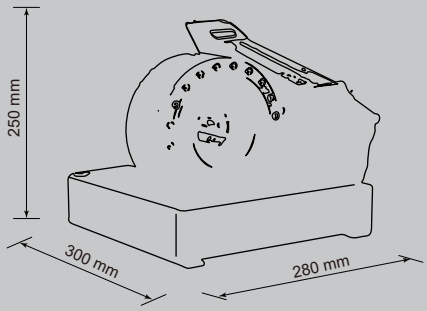

TECHNICAL DATA

Max crimping dia (mm/inch) [1]	45/1.77
Max crimping dia with master dies (mm/inch)	49/1.9
Max crimping force (KN)	955
Max crimping force (tonnage)	95
Hydraulic hose size (inch)	1 *
Industrial hose size (inch)	1.77 *
Die set series	16
Max opening (mm) [2]	+20
Max opening without dies (mm)	59
Master die D/L (mm)	39/64
Master die D/L (inch)	1.54/2.52
Motor Power	Air pressure

DIMENSIONS (LxWxH)

Machine (mm)	280x300x250
Machine (inch)	11.0x11.8x9.8
Packaged (mm)	480x480x370
Packaged (inch)	18.9x18.9x14.6

WEIGHT

Machine (kg/lbs)	45/99
Packaged (kg/lbs)	50/110

*** ACCORDING TO THE FITTING.**

DIMENSIONS P16APZ (LxWxH)

Crimping head (mm)	197x228x333
Crimping head (inch)	7.7x8.9x13.1
Hose length (metres)	4

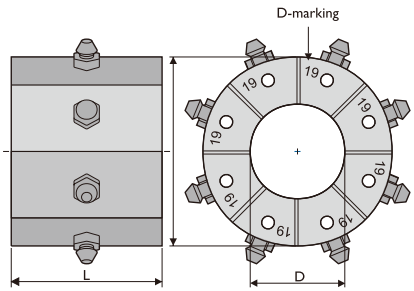

1) With standard dies. Crimping range can be increased with special dies.
2) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

DIE SET 16-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18212/10	10	55	10.0-12.0
18212/12	12	55	12.0-14.0
18212/14	14	55	14.0-16.0
18212/16	16	55	16.0-19.0
18212/19	19	55	19.0-23.0
18212/23	23	55	23.0-27.0
18212/27	27	65	27.0-31.0
18212/31	31	65	31.0-38.0

* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.